





### Welcome to our world!

FEATURES GUIDE 04
PRODUCT OVERVIEW 06

<b>Ørganic VENEER PARQUET</b>	08	mo.re! Laminate Flooring	94
		HERRINGBONE 8	98
Rocko SPC Flooring	18	ALTITUDE	104
		ATLANTIC 12	110
O.R.C.A. Flooring	50	ATLANTIC 10	116
<b>Ørganic</b> FLEX	56	ATLANTIC 8	130
<b>Ørganic</b> LONG	66		
<b>Ørganic</b> CLASSIC	72	Classic Laminate Flooring	146
<b>Ørganic</b> CLEVER SILENT	86	SUPER NATURAL	150
		CASTELLO	172

FORMAT OVERVIEW

SKIRTING BOARDS

**DECOR OVERVIEW** 

PACKAGING INFORMATION

**ACCESSORIES** 

178

180

186

188

190




www.krono-original.com

www.facebook.com/KronoOriginal















Made by Kronospan

## Features guide Your benefits at a glance



All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.

Residential guarantee



Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Warm underfoot Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.



Inspired by traditional craftsmanship, the true-edgebevels provide a harmonious room appearance.



Anti-slip

class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.

Soft bevel



Anti bacterial comfort

A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. Tested germs: Staphylococcus aureus



R9 and R10 according to DIN 51130 and DIN EN 16165, A and B according DIN 51097 and DIN EN 16165



The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.



Up to 60 different panels on digitally printed design are possible. This lends your flooring an authentic appearance that is virtually free of repetition.






Microscratch


protect





The flooring has a soft surface and feels very com-







fortable.



Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



Real wood

This floor is made from real wood. The high-quality brushed oak surface gives every room natural elegance.

Pet-proof



The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains nonfading according to rating 6 of the Blue Wool Scale.



resistant

Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.

Anti-static

The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.

Silent





### **Product overview**

	Collection Name	Durability (Wear Resistance)	Coreboard (Water Protection)	Thickness
Veneer Parquet	<b>7 ganic*1 VENEER PARQUET</b> 1383 x 244 mm   54.45" x 9.61"	Titanium Ultra	moisture resistant moisture resistance technology	8.5 mm
SPC Flooring	<b>ROCKO</b> 1210 x 192 mm   47.64" x 7.56"	Titanium Ultra	SPC SPC	5+1 mm PerfectPad® IXPE
	1210 x 192 mm   47.64" x 7.56" 1210 x 234 mm   47.64" x 9.21" 1210 x 295 mm   47.64" x 11.61"	Titanium Ultra	SPC SPC	5 mm
O.R.C.A. Flooring	<b>In arganic 1 FLEX</b> 638 x 322 mm   25.12" x 12.68" 1288 x 189 mm   50.71" x 7.44"	Titanium Ultra	waterproof *3 O.R.C.N. MOISTURE DEFRISE HERMOLOGY	7 mm PerfectPad® Cork
	<b>∕</b> grganic <sup>-1</sup> LONG 2003 x 195 mm   78.86" x 7.68"	AC5	Waterproof O.R.C.N. MOISTURE DEFENSE TECHNOLOGY	8 mm
	<b>∕</b> grganic <sup>-1</sup> CLASSIC 638 x 330 mm   25.12" x 12.99" 1288 x 195 mm   50.71" x 7.68"	AC5	Waterproof 3 O.R.C.N.8. MOSTURE DEFINSE TECHNOLOGY	8 mm
	<b>% rganic⁺¹ CLEVER SILENT</b> 1288 x 195 mm   50.71" x 7.68"	AC5	Waterproof O.R.C.A. Moisture defense technology	<b>6+1 mm</b> PS Pad
mo.re! Laminate Flooring	HERRINGBONE 8 630 x 126 mm   24.80" x 4.96"	C AC5	moisture resistant moisture resistance technology	8 mm
	<b>ALTITUDE</b> 2003 x 245 mm   78.86" x 9.65"	AC5	moisture resistant moisture resistance technology	12 mm
	ATLANTIC 12 1288 x 195 mm   50.71" x 7.68"	AC5	moisture resistant technology	12 mm
	ATLANTIC 10 1288 x 195 mm   50.71" x 7.68"	AC5	moisture resistant moisture resistance technology	10 mm
	ATLANTIC 8 638 x 330 mm   25.12" x 12.99" 1288 x 195 mm   50.71" x 7.68"	AC4	moisture resistance technology	8 mm
Classic Laminate Flooring	SUPER NATURAL 1288 x 195 mm   50.71" x 7.68"	AC4	HDF	8 mm
	CASTELLO 1285 x 192 mm   50.59" x 7.56"	AC4	HDF	8 mm

<sup>\* 1</sup> Consists of natural wood and an organic chemical binder

<sup>\*2</sup> Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)

<sup>\*3 24</sup> h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05

Pet- proof	Utilization Class	Residential Guarantee <sup>*5</sup>	Bevel	Joint	Authentic Embossed	SKUs
*	32	20 years	Soft Bevel	Tap Loc	-	6
*	34	30 years	<b>V</b> 4	1clic 2go pure	-	8
<b>*</b>	34	30 years	V4	1clic 2go pure	-	24
<b>₩</b>	34	30 years	<b>V</b> 4	1clic 2go pure+	-	11
*	33	30 years	V4	1clic 2go pure+	Yes	6
*	33	30 years	V4	1clic 2go pure+	Yes* <sup>6</sup>	15
<b>*</b>	32	20 years	V4	1clic 2go pure+	Yes	8
*	32	20 years	V4	Fold Down	Yes	4
*	33	30 years	V4	1clic 2go pure+	Yes	6
*	33	30 years	V4	1clic 2go pure+	Yes	6
**	33	30 years	V4	1clic 2go pure+	Yes	15
*	32	20 years	<b>V</b> 4	1clic 2go pure+	Yes' <sup>6</sup>	21
*	32	20 years	V4	1clic 2go pure+	Yes*6	27
*	32	20 years	-	twin clic	-	6

<sup>\*4 24</sup> h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com

<sup>\*5</sup> According to warranty terms \*6 Selected decors ∑ 163



## The sustainable alternative to parquet

These wooden floorings are luxurious, cosy and natural. The high-quality brushed oak surface lends homely flair to any room. With the Veneer Parquet series, KRONOSPAN offers authentic wood floors with a real wood veneer as the top layer.



The special thing about it: KRONOSPAN combines the natural properties of the raw material wood with the technical refinements of a multi-layer construction. The top layer consists of a 0.6 millimeter wood veneer – the wood comes exclusively from sustainable forestry. The middle layer consists of a high-density fibreboard (HDF). This makes the flooring particularly stable and durable. Thanks to these properties, Veneer Parquet is a resource-saving and sustainable alternative to conventional parquet flooring.




The innovative feature, mo.re! technology, is the intelligent moisture protection. This means the real wooden surface of the floor is also protected for just in case.




Real wood



Feel the nature

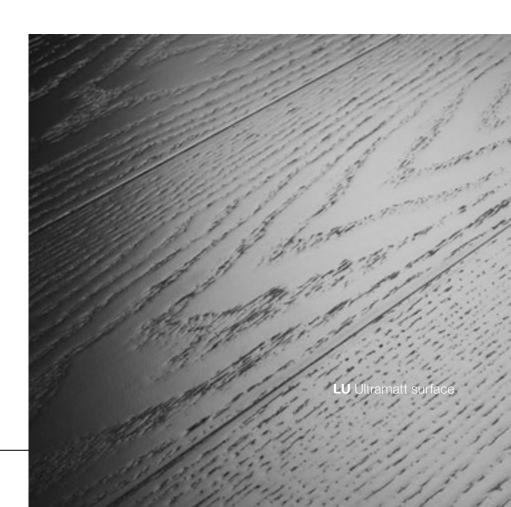

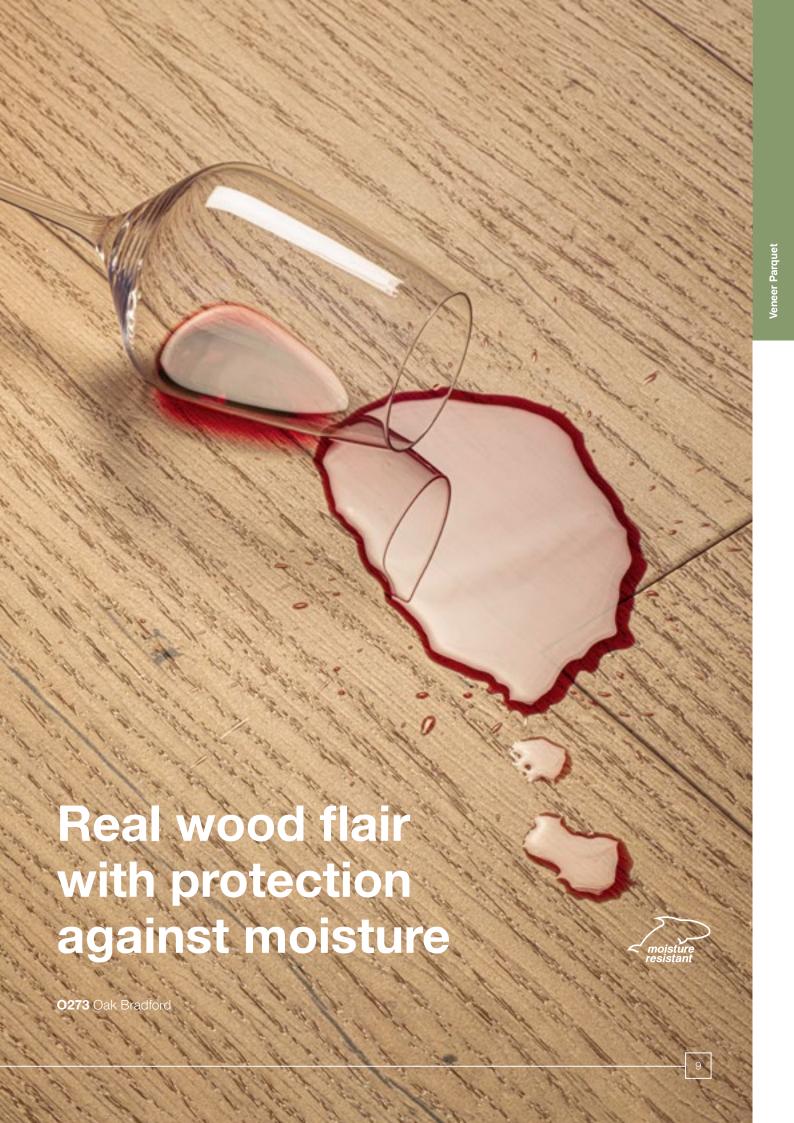





Residential guarantee



Utilization class



Soft bevel

#### **Ultramatt surface**

Real wood flair

#### **Eco-friendly**

Wood from sustainably managed forests

#### Moisture resistant\*

thanks to mo.re! technology

#### Soft bevel

True-Edge-Bevel for a harmonious room appearance

#### **Easy installation**

Ideal for renovations thanks to low profile height

#### Modern wide planks: 1383 x 244 mm

Amazing designs

<sup>\*</sup> Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)





# rganic **VENEER PARQUET**





8.5 mm

**1383 x 244 mm** | 54.45" x 9.61"

Tap Loc











































# Waterproof SPC flooring with superior performance

#### Innovative SPC floors with unique design

Waterproof Rocko Flooring, made of over 70% of mineral core, finished with high-quality UV coating, is an outstanding material for domestic and commercial use, both in new projects and renovations.

#### Appearance of natural wood & stone

Rocko Flooring designs are digitally printed, reflecting the smallest detail, the rich grain of wood and roughness of stones and concrete.

#### **Ensured stability**


Rocko Flooring range is set apart from other types of vinyl flooring by its unique resilient core, which provides an incredibly stable base for each flooring plank and ensures dimensional stability, even with high temperature fluctuations.

# Coordinated solution

Available in 3 different formats, allows for any design finishing, going beyond the standard flooring frame. It comes with complementary accessories: waterproof flooring skirting boards, underlay and cleaning liquid for coordinated solution.



Check out the complete collection!

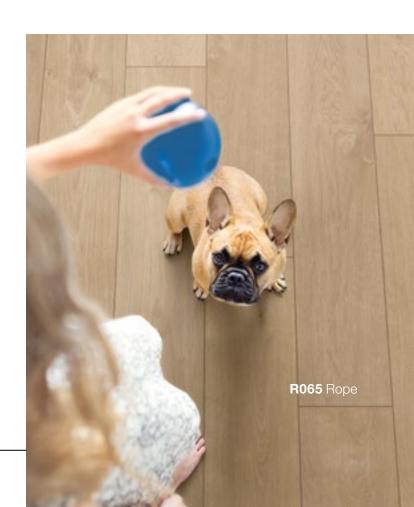









#### Waterproof

Rocko Flooring is suitable for indoor use in humid conditions, such as bathroom, laundry room, kitchen or vestibule.

#### **Dimensional stability**

Rocko Flooring does not change its dimensions under the influence of temperature and humidity changes. It can be used in sunny and shaded areas as well as in dry and humid ones.

#### **Utility class**

Due to its parameters, Rocko Flooring reaches the highest utility class. It can be used in intensively used domestic areas as corridor or kitchen, as well as in commercial spaces with high traffic, such as offices.


#### **Underfloor heating**

Rocko Flooring is well suited for underfloor heating, thanks to its mineral content and its very good thermal conductivity parameters.

#### V-groove

Real v-groove on 4 sides of each plank.



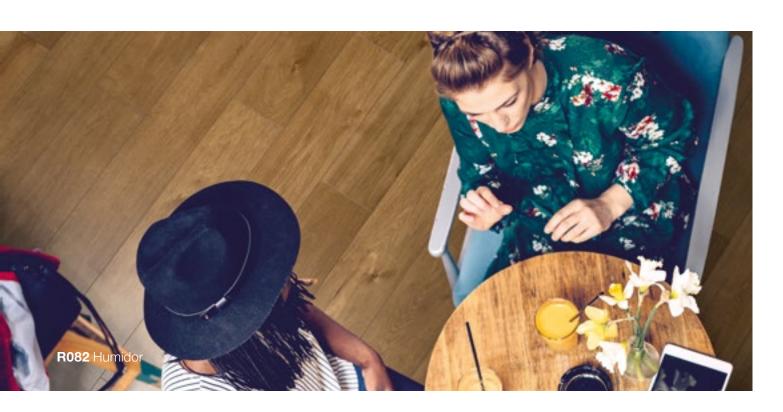

## **ROCKO**

with **Perfect**Pad® IXPE 1 mm



Thickness: **5+1 mm** 

Format:

**1210 x 192 mm** | 47.64" x 7.56"

Lock:

1clic 2go pure









EN 16511




































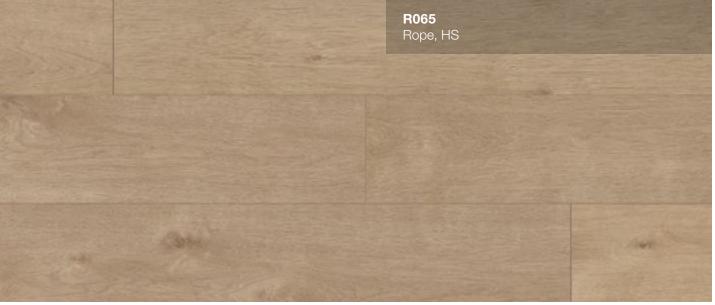

















## **ROCKO**



Thickness:


5 mm

Formats:

1210 x 192 mm | 47.64" x 7.56" 1210 x 234 mm | 47.64" x 9.21" 1210 x 295 mm | 47.64" x 11.61"

Lock:

1clic 2go pure











EN 16511


















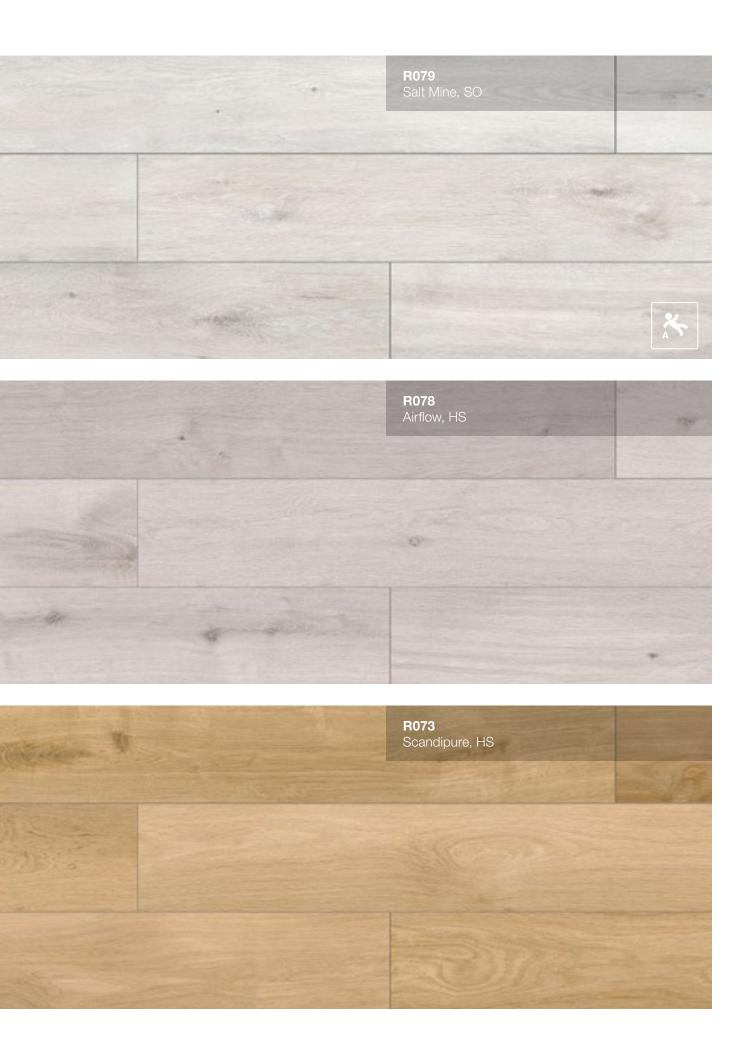




















































































































## How O.R.C.A. technology works

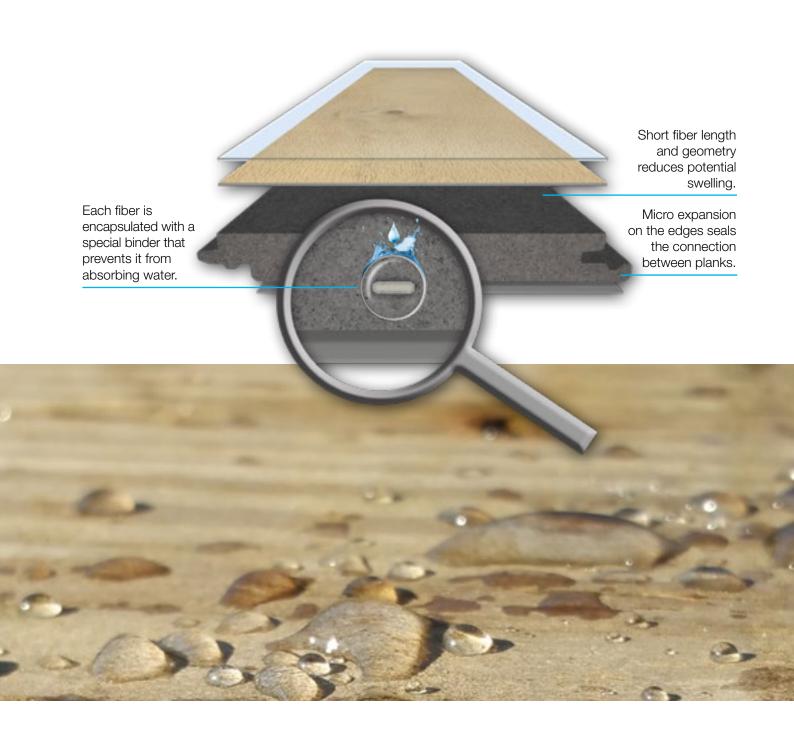



# Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration.

Boat builders take advantage of wood's natural self sealing property.

Wine barrels are still sealed using this time tested method.





### The floor that combines the best

**O.R.C.A.** = **O**rganic\*<sup>1</sup> **R**igid **C**oreboard **A**brasion-proof

### O.R.C.A. is twice as good

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic\*1 materials are made resistant to liquids by means of a special technology.

# O.R.C.A. makes the flooring usable anywhere

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms\*2 where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

### O.R.C.A. floors are extremely robust

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

# O.R.C.A. is built better because it is more elaborately manufactured

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.



# The floor that's not afraid of water

# 100 h+ splash-water protection quaranteed\*3

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.



Scan the QR code and convince yourself!

- \*1 Consists of natural wood and an organic chemical binder
- \*2 Please observe installation instructions
- \*3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05



So reliable you can afford to take the plunge





# The flooring that is naturally nature-friendly







#### Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

### CO<sub>2</sub>-negative

O.R.C.A. boards are CO<sub>2</sub>-negative because manufacturing O.R.C.A. releases less CO<sub>2</sub> than was stored by the tree.

### **Organic**

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

### **PVC-free**

Our O.R.C.A. products contain no PVC\*.





<sup>\*</sup> May contain traces of PVC, e.g. from packaging









with PerfectPad® Cork 1 mm





Thickness **7 mm** 

Formats:

**638 x 322 mm |** 25.12" x 12.68" **1288 x 189 mm |** 50.71" x 7.44"

Lock:

1clic 2go pure+











EN 16511






















































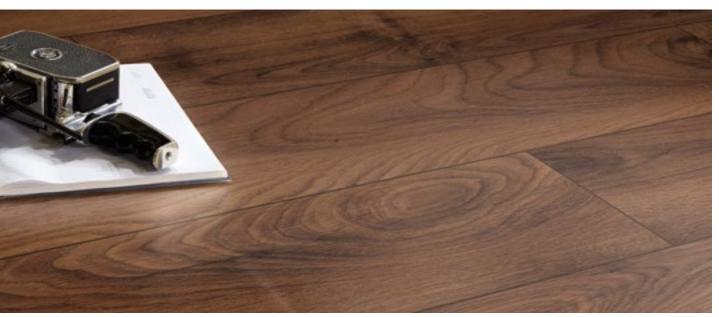

















Thickness: 8 mm

F-----

**2003 x 195 mm** | 78.86" x 7.68"

Lock:

1clic 2go pure+









EN 13329















































8 mm

**638 x 330 mm** | 25.12" x 12.99" **1288 x 195 mm** | 50.71" x 7.68"

1clic 2go pure+






























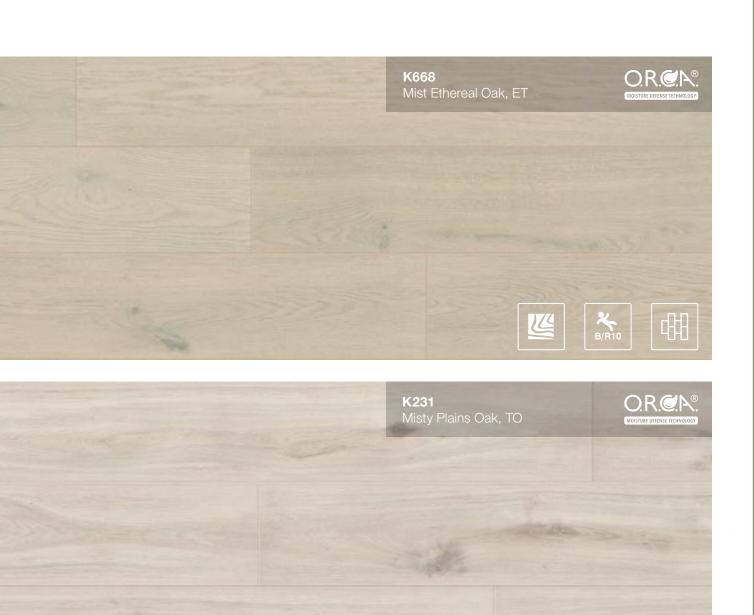






















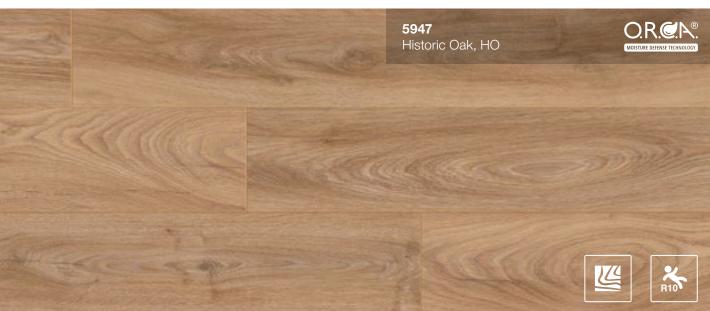












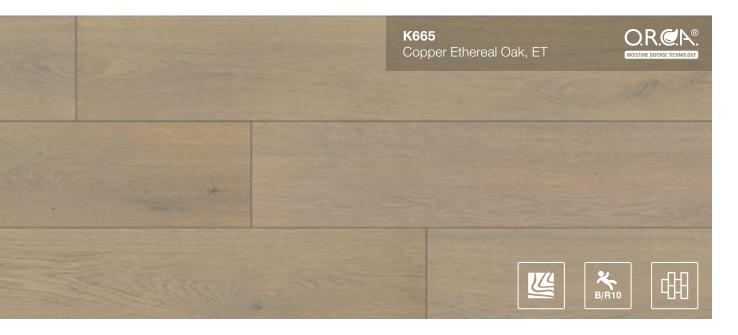












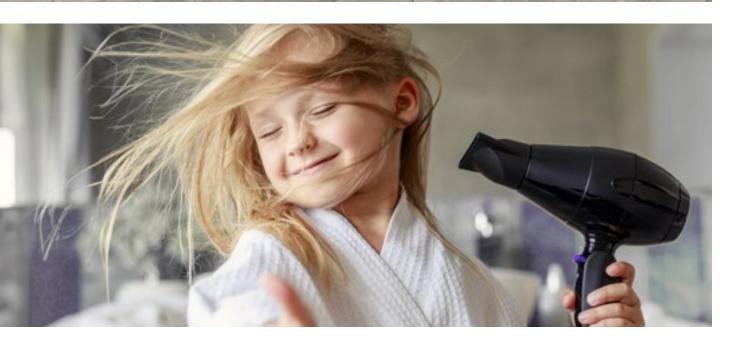















# rganic CLEVER SILENT

with PS Pad 1 mm





Thickness **6+1 mm** 

Format<sup>1</sup>

**1288 x 195 mm** | 50.71" x 7.68"

المماد

1clic 2go pure+









EN 13329






































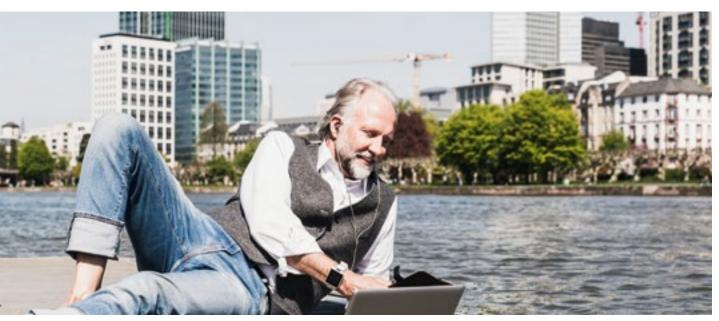
















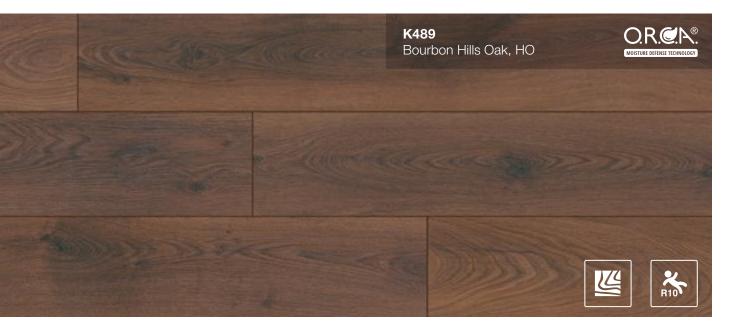



# Laminate Flooring Take more. Endure more. Withstand more.

mo.re! from KRONOSPAN is a moisture-resistant laminate flooring product that makes laminate even more practical for everyday life.



**mo.re!** makes laminate flooring even more moisture-resistant. And that's a good thing. After all, small everyday mishaps can happen to anyone.

# How mo.re! technology works

#### mo.re! is based on a specially developed substrate formula.


Its new binding agent makes the flooring more durable and decreases swelling – improving resistance to moisture penetration.



Scan the QR code and check out the mo.re! features!

<sup>\* 24</sup> h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com-



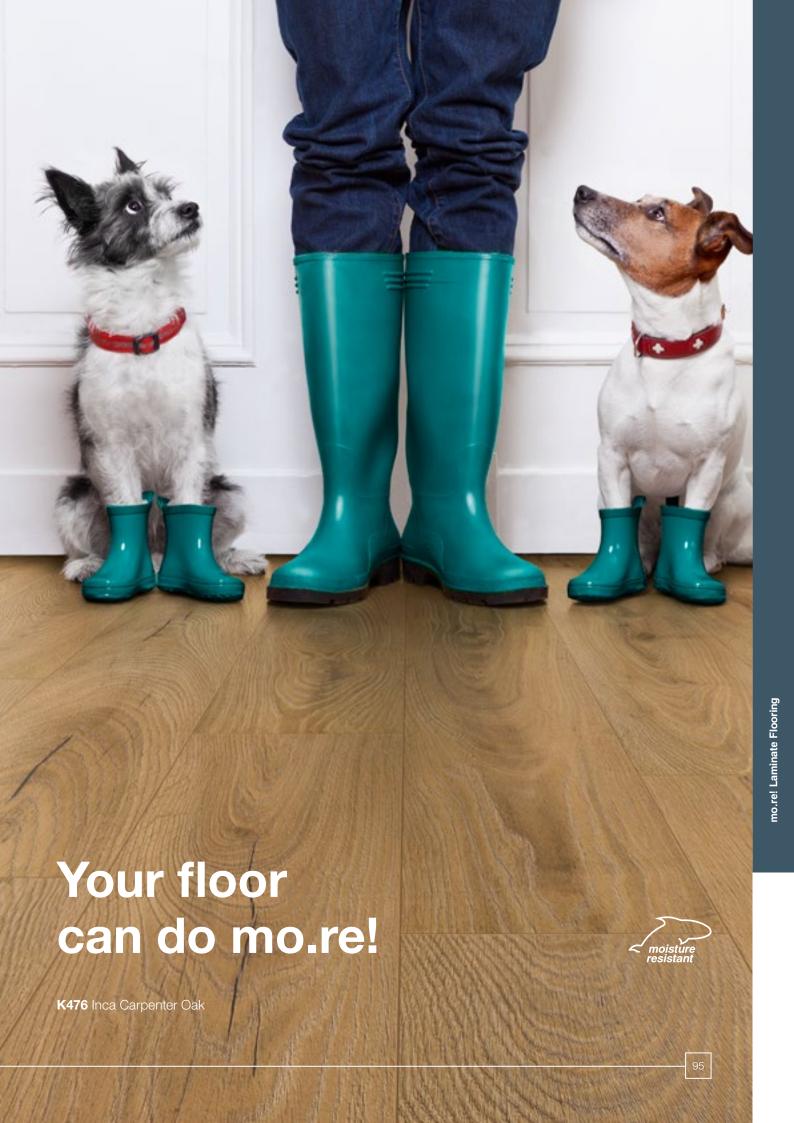







It is **much more moisture-resistant** than traditional laminate flooring


It is  $\textbf{A.B.C. surface}^{\star}$  inhibits bacteria growth on floors to protect your family

It is **light-resistant**: Even on days when the sun is shining for hours, your flooring remains nonfading according to rating 6 of the Blue Wool Scale.

It is **perfect for life with house pets** – the robust and hard-wearing surface masters the everyday challenges of households with pets

It is great for installation in private bathrooms\*\*

It is available in **utilization classes 32 and 33** according to DIN EN 13329

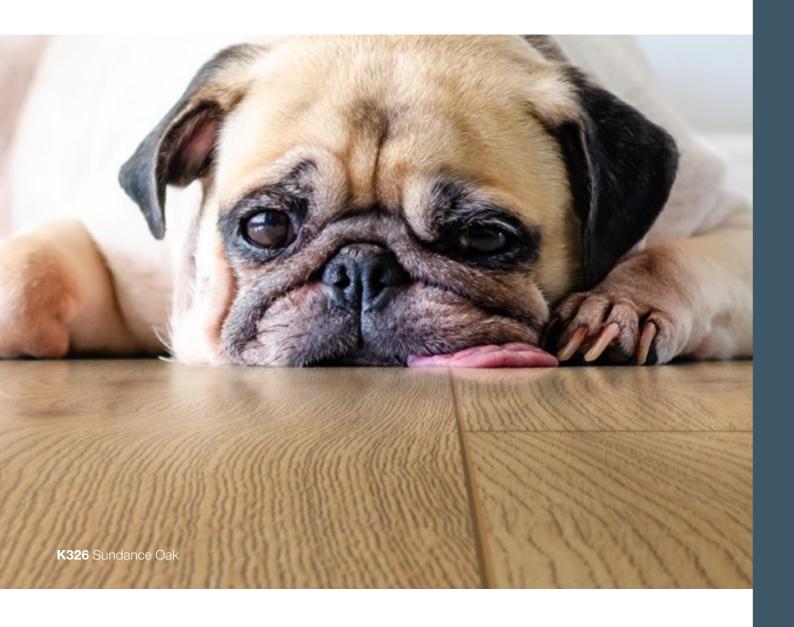



# mo.re! for the environment

#### mo.re! offers more, even for the environment

It is made using only wood from sustainably managed forests. And KRONOSPAN does not use any PVC in flooring with the mo.re! technology. This demonstrates our commitment to environmental stewardship. mo.re! substrate is  $\mathrm{CO}_2$ -negative: Processing a tree to make this product emits less  $\mathrm{CO}_2$  than the tree has stored in its life.





<sup>\*</sup> May contain traces of PVC, e.g. from packaging

#### **HERRINGBONE 8**





Thickness:

8 mm

Format:

**630 x 126 mm** | 24.80" x 4.96"

Lock:

**Fold Down** 




































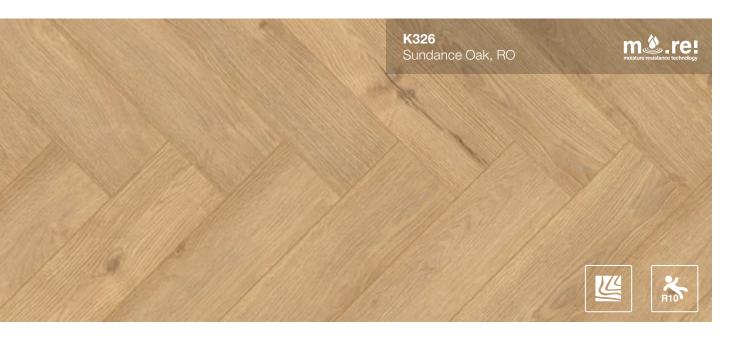

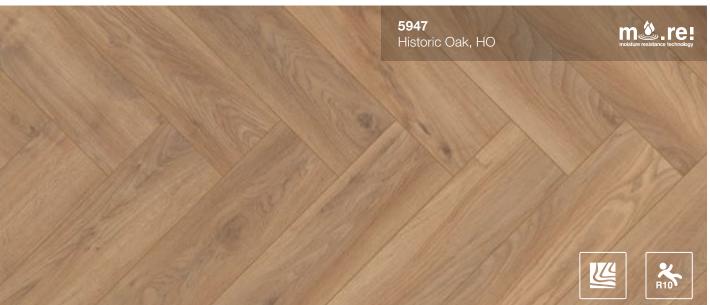

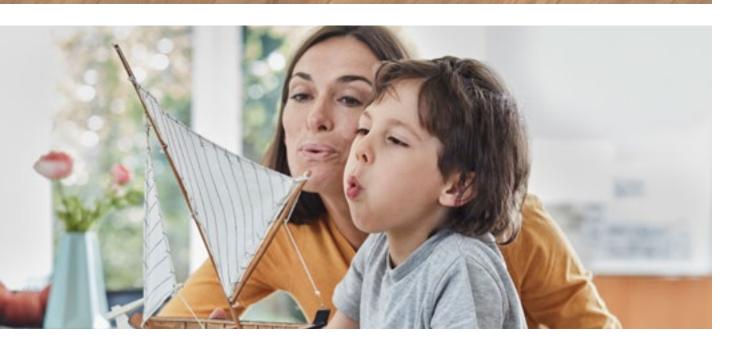











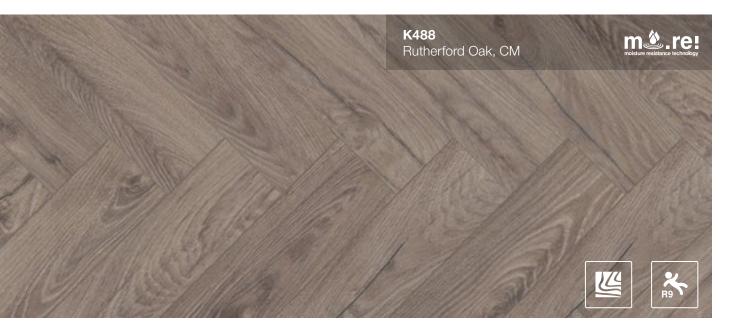



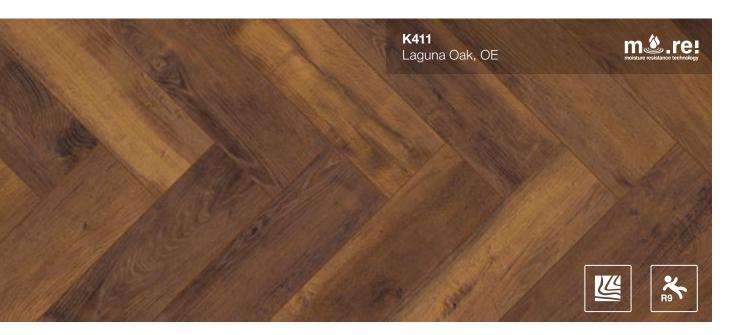

### **ALTITUDE**





Thickness: 12 mm

Format:

**2003 x 245 mm** | 78.86" x 9.65"

Lock:

1clic 2go pure+









EN 13329























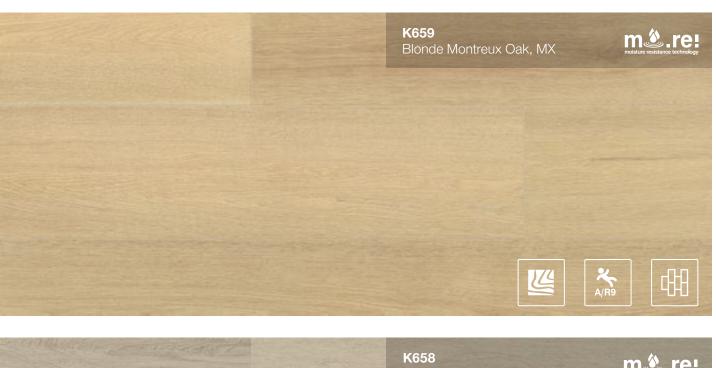

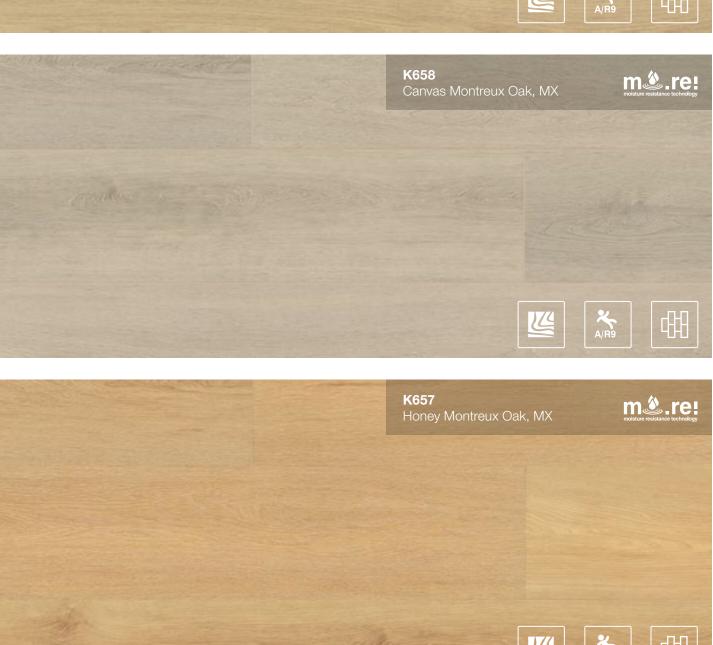





















## **ATLANTIC 12**





Thickness: 12 mm

Format:

**1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329







































## **ATLANTIC 10**





Thickness: 10 mm

Format:

**1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329




















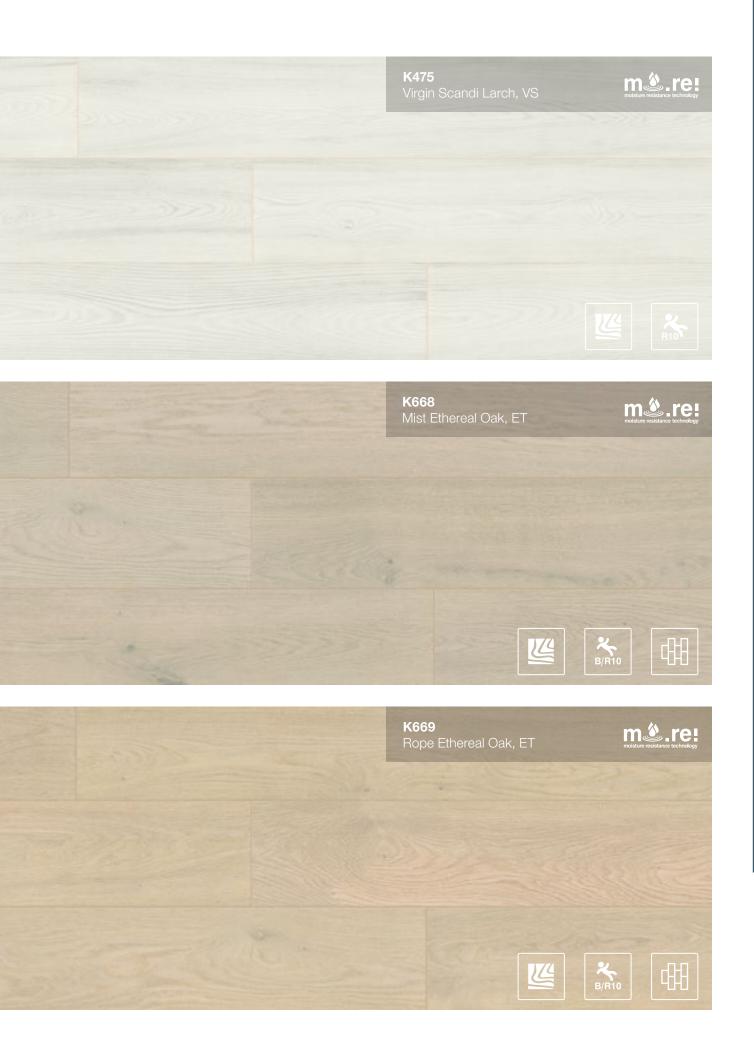


















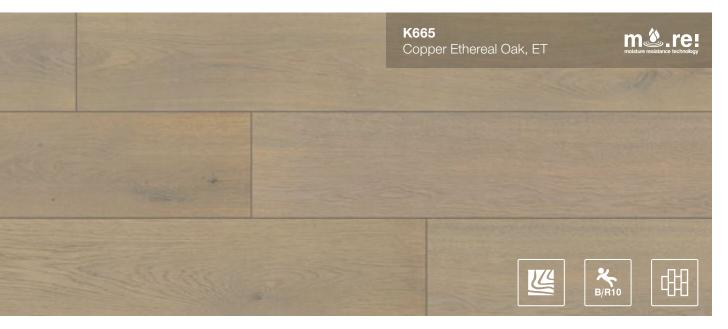















































## **ATLANTIC** 8





Thickness: 8 mm

Formats:

**638 x 330 mm** | 25.12" x 12.99" **1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+












EN 13329










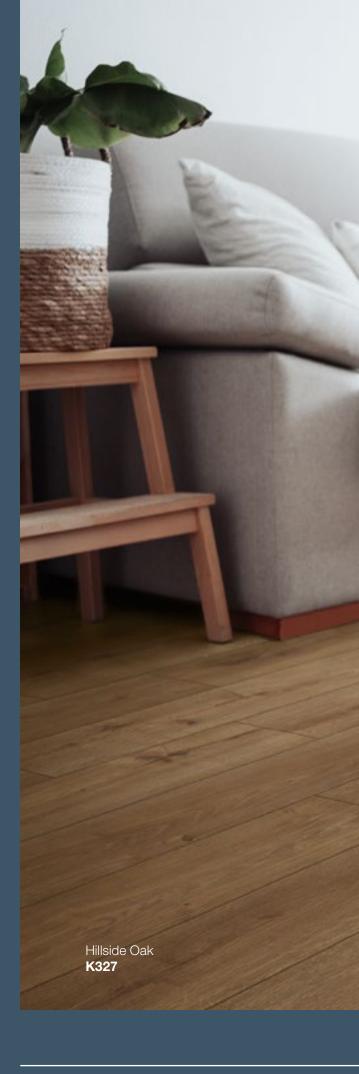

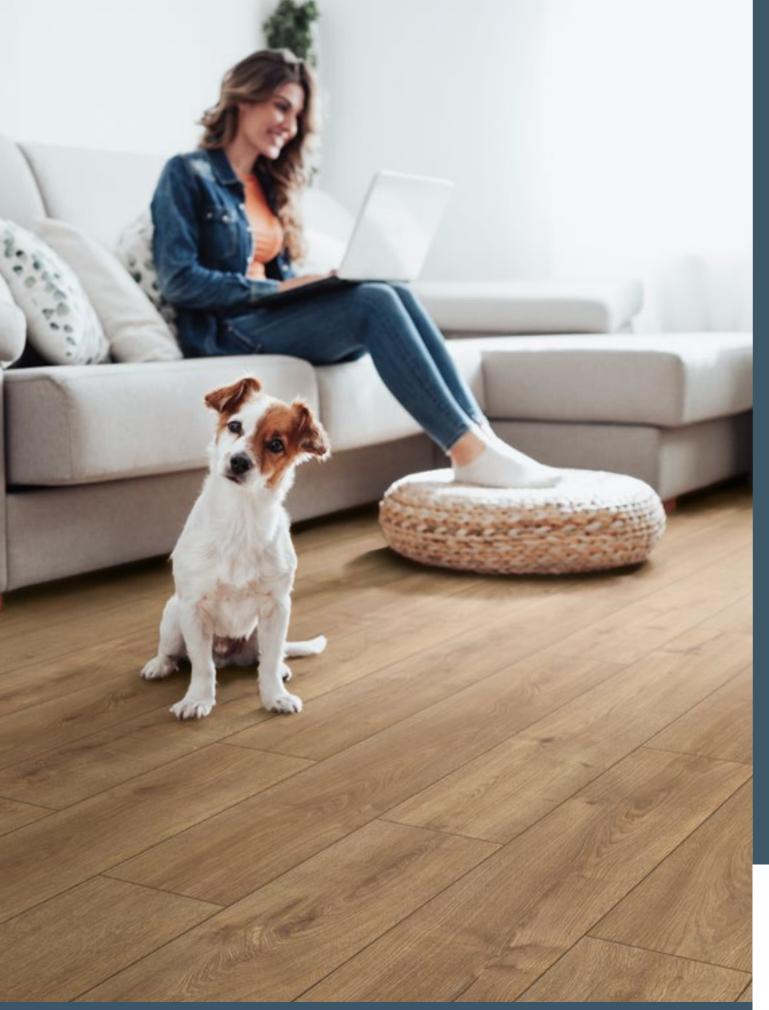




















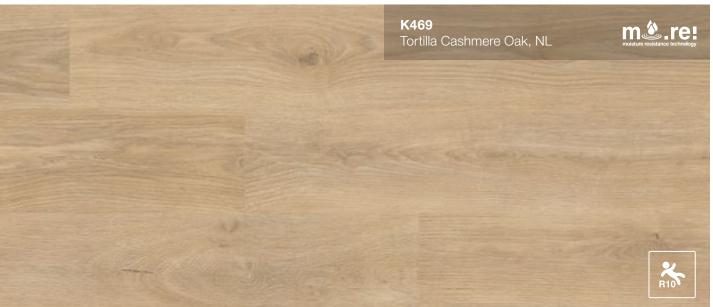
















































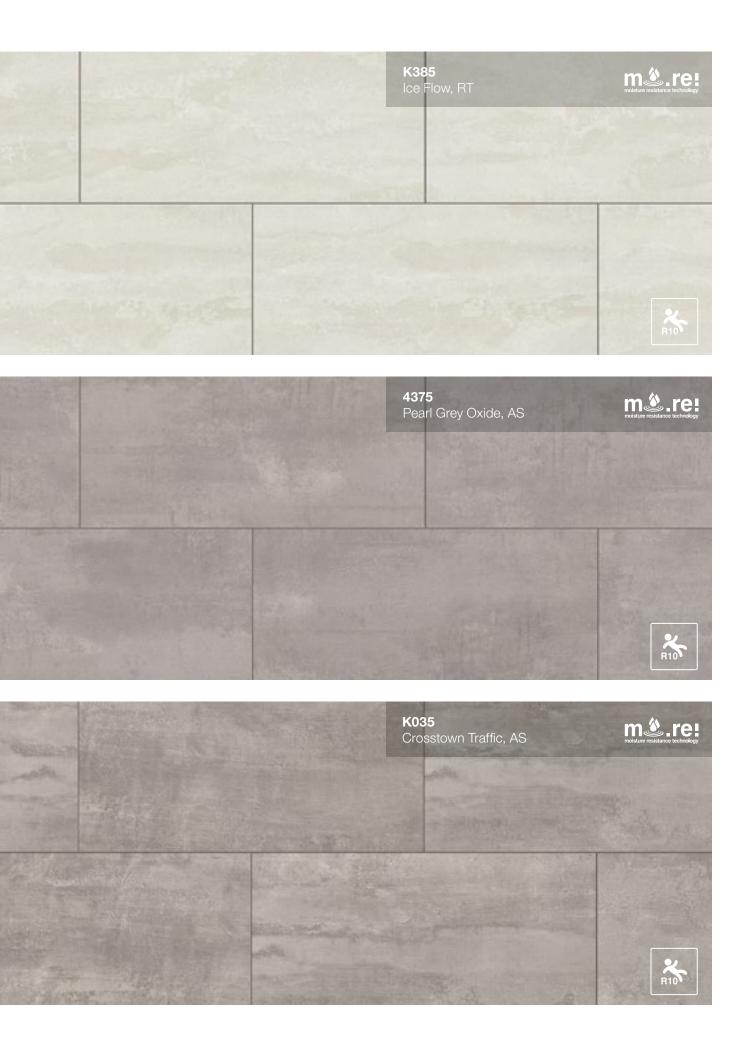

















# Give your surroundings a unique flair



Laminate enjoys a fantastic reputation as an absolute all-rounder. There is hardly an area or room that is not suitable for its installation. Whether children's rooms or living rooms, offices or shops, with or without pets – laminate flooring is a beautiful and uncomplicated partner thanks to its robustness and durability.

The list of advantages of laminate flooring is long – easy to clean and therefore hygienic, anti bacterial thanks to surface structures that bacteria cannot adhere to, light-resistant and hard-wearing. Last but not least, there is the range of decors and surfaces, that leave nothing to be desired.

## Authenticity you can see and feel

Very close to the original – these are laminate decors, whose appearance is made up of two factors – image and surface.

Color and light form the symbiosis for a perfect reproduction of wood, stone and tiles. And the perfect optical representation is complemented by the tactile reproduction. Vision and touch, the interaction of the senses.











### Easy to install

The sophisticated KronoOriginal® click systems make installation child's play. The prerequisite is good preparation – having all panel materials, accessories and tools at the ready, as well as planning with the help of the checklist and the appropriate instructions.

### The floor for every requirement

An important factor when choosing a laminate floor is the utility class. The more a room is frequented and therefore the floor is challenged, the higher the usage class has to be. The utility class describes the possible stress on the entire panel and thus indicates whether the flooring is recommended mainly for private or also for commercial use. This consideration is important regarding to the warranty conditions.

**Utilization class 32 (EN 13329)** Suitable for heavy domestic and medium commercial use











### **Healthy living**

A.B.C. – Anti Bacterial Comfort ensures that bacteria\*1, dust mites and microbes have no chance of settling on them. This makes cleaning the laminate flooring easier and quicker and therefore particularly hygienic.

Healthy living also means that additives such as PVC\*2, chloride or wood preservatives are not used and can therefore neither trigger nor intensify allergies.

## **Sustainable**

Laminate flooring consists of around 90 percent natural wood, which comes exclusively from sustainably managed forestry. This is guaranteed by the PEFC certificate.

Generally, all production processes are low-emission and therefore sustainable.



<sup>\*1</sup> Tested germs: Staphylococcus aureus \*2 May contain traces of PVC, e.g. from packaging

## SUPER NATURAL

Thickness 8 mm

Format:

**1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329









































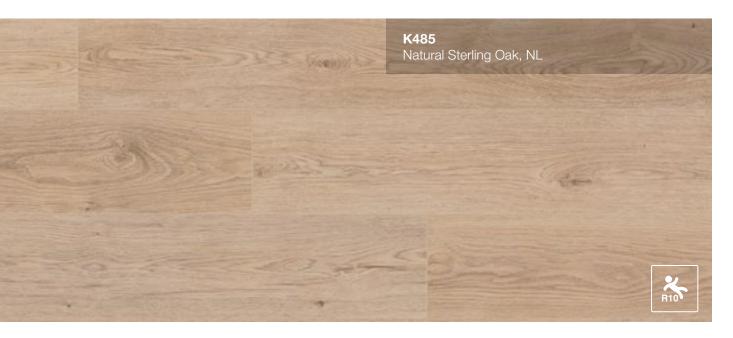

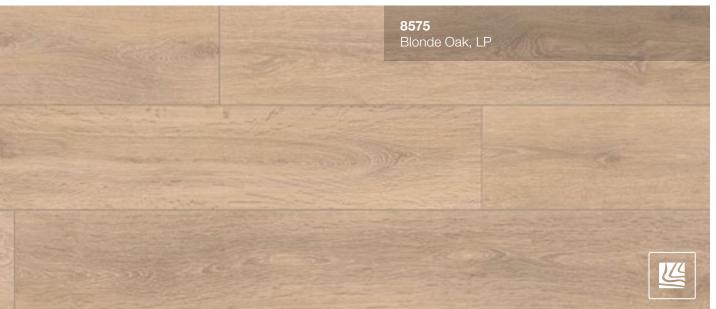
















































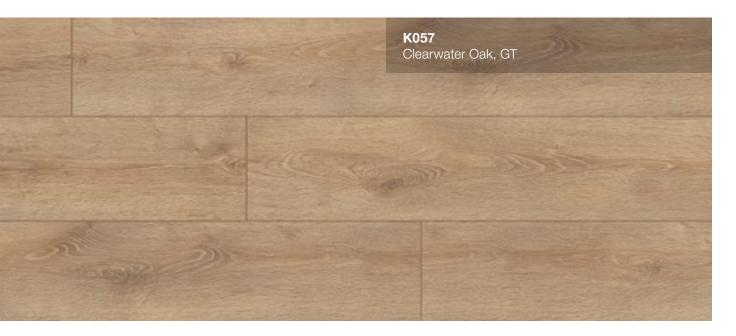












































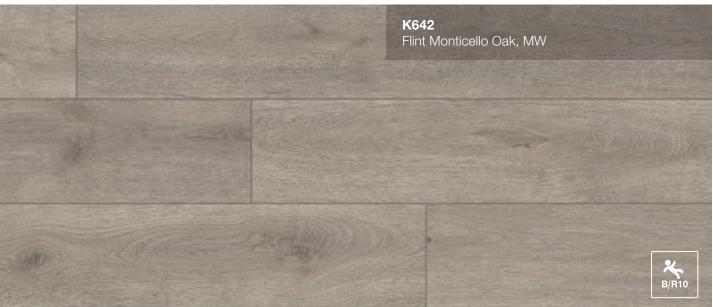



## CASTELLO

8 mm

Format: **1285 x 192 mm** | 50.59" x 7.56"

Lock: Twin clic









EN 13329








































## **Format overview**



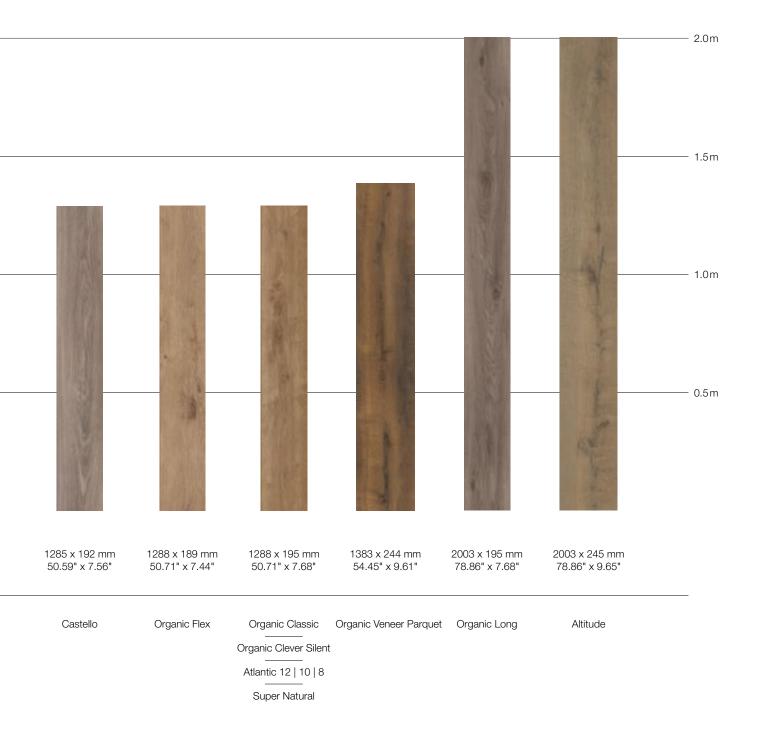



# Accessories that match your floor perfectly

## Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

## **Underlays**

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

## **Skirting boards**

Choose from a range of skirtings in various decors that match all KronoOriginal® floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

#### Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.



## All under one roof

Our guidance system shows the matching products for different types of floor.



Height: 8.5 mm



SPC flooring:

Height: 5 mm and 5+1 mm, including silent pad, floating installation



O.R.C.A. flooring:

Height: 6+1, 7 and 8 mm, organic rigid coreboard, floating installation



Laminate flooring:

Height: 8, 10 and 12 mm

## **Underlays**

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA] 98535 [EX PUR1.0_SPC]	Material: PET film + polyurethane heavy- duty layer + non-woven material	1 x 10 m = 10 m <sup>2</sup>	Veneer Parquet SPC Flooring O.R.C.A. Flooring Flooring
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m <sup>2</sup>	Veneer Parquet SPC O.R.C.A. Flooring Coring Flooring
Underlay WOOD 5.0		90171 [EX 90171.]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m <sup>2</sup>	Veneer Parquet SPC Rooring O.R.C.A. Flooring Laminate Flooring
Underlay XPS 5.0		98536 [EX XPS5.0]	Material: Extruded polystyrene	1.18 x 4.7 m = 5.5 m <sup>2</sup>	Veneer Parquet SPC O.R.C.A. Flooring Control Floring Control Flooring Cont
Underlay XPS 2.2 ALU		98515 [EX XPS2.2ALU]	Material: HFPS-foam & moisture protection foil	1.2 x 12.5 m = 15 m <sup>2</sup>	Veneer Parquet SPC O.R.C.A. Rooring Rooring
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m <sup>2</sup>	Veneer Parquet SPC Rooring O.R.C.A. Rooring Laminate Rooring
Aluminium tape	0	98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)	Veneer Parquet SPC O.R.C.A. Rooring Coring Rooring



# **Skirting boards**

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
K58C	E	91061 [EX xxxxSLH]	2600 x 58 x 18 mm	10 pcs.	Veneer SPC O.R.C.A. Laminate Flooring Proofing
K58C skirting board moisture resistant	9	97345 [EX SK58C-xxxx]	2400 x 58 x 18 mm	10 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Laminate Flooring
K58C skirting board for floors with O.R.C.A. (Moisture Defense Technology)	d	95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.	Veneer SPC O.R.C.A. Flooring Flooring
Square cut skirting board		95951 [EX 9002DS19_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet SPC O.R.C.A. Rooring Flooring Flooring
Square cut skirting board	E	95481 [EX 9002DS19_70]	2600 x 70 x 17 mm	10 pcs.	Veneer Parquet SPC O.R.C.A. Coning Control Plants Proving Proving Control Prov
Square cut skirting board	E	95491 [EX 9002DS19_58]	2600 x 58 x 17 mm	10 pcs.	Veneer SPC O.R.C.A. Flooring Flooring
Shaped skirting board		95981 [EX 9002DS17_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet SPC O.R.C.A. Laminate Plooring Phooring

# **Skirting boards**

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Shaped skirting board	E	95991 [EX 9002DS17_70]	2600 x 70 x 17 mm	10 pcs.	Veneer   SPC   O.R.C.A.   Laminate   Rooring
Shaped skirting board	E	95471 [EX 9002DS17_58]	2600 x 58 x 17 mm	10 pcs.	Veneer   SPC   O.R.C.A.   Laminate   Plooring   Plooring
Rounded skirting board		96001 [EX 9002DS15_100]	2600 x 100 x 15 mm	5 pcs.	Veneer   SPC   O.R.C.A.   Laminate   Flooring   Flooring
Rounded skirting board		96021 [EX 9002DS16_90]	2600 x 90 x 16 mm	5 pcs.	Veneer   SPC   O.R.C.A.   Laminate   Plooring   Plooring
Rounded skirting board	E	96011 [EX 9002DS15_70]	2600 x 70 x 17 mm	10 pcs.	Veneer   SPC   O.R.C.A.   Laminate   Flooring   Flooring
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right	Veneer Parquet SPC Flooring O.R.C.A Flooring Laminate Flooring
Mounting clips	-	91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs	Veneer Parquet SPC O.R.C.A. Laminate Flooring



# **Profile systems**

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Design click transition profile, 2-part		95112 95113	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Flooring Flooring
Design click ramp profile, 2-part	1	95122 95123	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring
Design click end profile, 2-part	4	95132 95133	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Pooring Q.R.C.A. Flooring Flooring
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Plooring Flooring Flooring
Ramp click profile	1	98411 98401	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Rooring Pooring Pooring
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.	Veneer SPC O.R.C.A. Laminate Flooring Flooring

#### **Additional accessories**

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Tap-block		90274 [EX SCHLAGKLOTZ]	168/90 x 70 x 20 mm	20 pcs.	Veneer   Parquet   SPC   O.R.C.A.   Flooring   Continue   Flooring   Flooring   Continue   Flooring   Continue   Flooring   Floori
Clickguard™ joint sealant		90431 [EX 94270]	-	125 ml ≘ca. 10 m²	Veneer Parquet SPC Flooring O.R.C.A. Flooring Laminate Flooring
Laminate cleaner		90411 [EX 92011]	-	1000 ml	Veneer   SPC   O.R.C.A.   Laminate   Flooring   Flooring
Design floor cleaner		97554 [EX DESIGNBODEN_ REINIGER]	-	750 ml	Veneer Parquet SPC Flooring O.R.C.A. Laminate Flooring
Cleaner for floors with O.R.C.A. (Moisture Defense Technology)		90411 [EX REINIGER_ORCA]	-	750 ml	Veneer Parquet SPC O.R.C.A. Flooring Cong



## **Skirting boards**

# Decor matching overview


	Collection Name	Decor	Skirting board	Decor	Skirting board	Decor	Skirting board
Veneer Parquet	<b></b>	0272	9002-weiß	0274	9002-weiß	0352	9002-weiß
Ven	VENEER PARQUET	0273	9002-weiß	O350	9002-weiß	0462	9002-weiß
		R065	R065	R081	R081	R148	Z215
		R066	R066	R082	R082	R149	R124
		R070	R070	R109	R079	R150	Z212
ring g	ROCKO	R073	R073	R123	R073	R170	R124
SPC Flooring	nocko	R076	R076	R124	R124	R171	R091
		R077	R077	R125	R077	R172	R066
		R078	R078	R128	R073	R173	R073
		R079	R079	R129	R079	R174	R066
		K500	L133	K504	8836	K508	L137
		K501	4283	K505	8633	K509	L138
		K502	L134	K506	5542	K510	L139
		K503	L135	K507	L129		
		8156	8156	K287	8096	K450	8816
	LONG	K284	8575	K327	8521	K451	L004
C.A.		5947	8285	K385	8282	K406	8575
O.R.C.A. Flooring	_	K035	4375	K387	L061	K479	L105
		K224	8634	K389	8475	K665	L118
		K230	8836	K395	L071	K668	8206
		K231	L003	K405	R002	K669	L121
		5543	5543	K413	L064	K489	L131
		K063	9855	K452	4275	K598	5549
	OLEVEN SILENT	K327	8521	K488	L128		
	HEDDINGBONE O	5947	8285	K411	5539		
gui	HERRINGBONE 8	K326	8836	K488	L128		
re! Floor	ALTITUDE	K326	8836	K658	L120	K662	L125
mo.l	ALTITUDE	K657	8836	K659	8220	K664	L125
mo.re! Laminate Flooring	ATLANTIC 12	5542	5542	K287	8096	K450	8816
	ATLANTIC 12	K285	4274	K336	L003	K476	8573

5537     8573     K412     8573     K479       5947     8285     K413     L064     K665       ATLANTIC 10     8155     8155     K475     5570     K667	L118 9701
	9701
ATLANTIC 10 8155 8155 K475 5570 K667	
	9206
<b>8156</b> 8156 <b>K476</b> 8573 <b>K668</b>	0200
K411 5539 K478 5542 K669	L121
<b>4375</b> 4375 <b>K389</b> 8475 <b>K471</b>	L123
K411   5539   K478   5542   K669	8836
<b>K326</b> 8836 <b>K451</b> 8461 <b>K634</b>	8575
ATLANTIC 8 K327 8092 K453 9807 K640	9701
<b>K385</b> 8282 <b>K461</b> L122 <b>K649</b>	5550
<b>K387</b> L061 <b>K463</b> 8467 <b>K650</b>	Z149
<b>K388</b> L062 <b>K469</b> 8220 <b>K653</b>	L143
<b>5541</b> 5541 <b>8631</b> 8631 <b>K625</b>	8837
<b>5542</b> 5542 <b>K057</b> 8220 <b>K629</b>	8836
<b>5543</b> 5543 <b>K338</b> 4274 <b>K633</b>	R002
5946 L004 <b>K407</b> L070 <b>K635</b>	L123
SUPER NATURAL 5966 5543 K418 L057 K638  5985 8573 K419 8220 K641  8573 8573 K468 5549 K642	8836
5985 8573 <b>K419</b> 8220 <b>K641</b>	9855
8573 8573 K468 5549 K642	5542
8575 8575 <b>K482</b> 8374 <b>K647</b>	L123
<b>8630</b> 8630 <b>K485</b> 4283 <b>K652</b>	9807
CASTELLO K039 L004 K396 L003 K470	8837
K395 L071 K462 5549 K656	8575



#### **Decor overview**

Flooring Type	Collection Name	Decors
Veneer	Ørganic VENEER PARQUET	O273 O462 O274 O350 O272 O352
SPC Flooring	поско	R079 R129 R078 R109 R148 R172 R174 R077 R065 R125
	∕grganic FLEX	K500 K503 K506 K501 K507 K504 K502 K505 K508 K509
O.R.C.A. Flooring	∕arganic LONG	K451 K284 K450 K327 K287 8156
O. F.O.	∕arganic CLASSIC	K668 K231 K669 K406 K405 K230 5947 K224 K665 K395
	∕arganic CLEVER SILENT	5543 K063 K452 K413 K488 K598 K327 K489
mo.rei Laminate Flooring	HERRINGBONE 8	K326 5947 K488 K411
	ALTITUDE	K659 K658 K657 K326 K662 K664
	ATLANTIC 12	K336 5542 K285 K450 K476 K287
	ATLANTIC 10	K475 K668 K669 K667 K478 K665 K476 5537 5947 K412
	ATLANTIC 8	K640 K451 K392 K463 K469 K453 K653 K326 K327 K471
Classic Laminate Flooring	SUPER NATURAL	8630 5543 K652 K418 5542 K485 8575 5966 5946 K407
Cla	CASTELLO	K470 K656 K462 K396 K039 K395

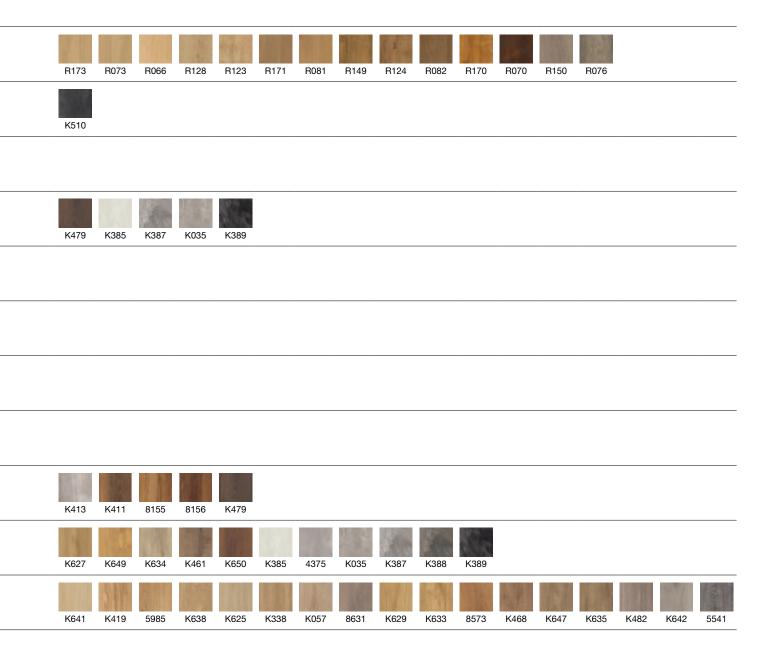



# **Packaging information**

Flooring Type	Collection Name	Plank Size	Thickness	Planks/ Pack.	m²   sq ft/Pack.
Veneer	Ørganic VENEER PARQUET	1383 x 244 mm   54.45" x 9.61"	8.5 mm	7	2.36   25.42
SPC Flooring	ROCKO	1210 x 192 mm   47.64" x 7.56" 1210 x 192 mm   47.64" x 7.56" 1210 x 234 mm   47.64" x 9.21" 1210 x 295 mm   47.64" x 11.61"	5+1 mm 5 mm 5 mm 5 mm	7 8 7 7	1.63   17.54 1.86   20.01 1.98   21.30 2.50   26.90
	<b>Ørganic</b> FLEX	638 x 322 mm   25.12" x 12.68" 1288 x 189 mm   50.71" x 7.44"	7 mm 7 mm	12 10	2.47   26.53 2.43   26.19
O.R.C.A. Flooring	Ørganic LONG	2003 x 195 mm   78.86" x 7.68"	8 mm	7	2.73   29.42
O.R R.OO	Ørganic CLASSIC	638 x 330 mm   25.12" x 12.99" 1288 x 195 mm   50.71" x 7.68"	8 mm 8 mm	11 9	2.32   24.92 2.26   24.32
	Ørganic CLEVER SILENT	1288 x 195 mm   50.71" x 7.68"	6+1 mm	9	2.26   24.32
	HERRINGBONE 8	630 x 126 mm   24.80" x 4.96"	8 mm	11	0.87   9.40
mo.re! Laminate Flooring	ALTITUDE	2003 x 245 mm   78.86" x 9.65"	12 mm	4	1.96   21.12
	ATLANTIC 12	1288 x 195 mm   50.71" x 7.68"	12 mm	6	1.51   16.21
	ATLANTIC 10	1288 x 195 mm   50.71" x 7.68"	10 mm	7	1.76   18.92
	ATLANTIC 8	638 x 330 mm   25.12" x 12.99" 1288 x 195 mm   50.71" x 7.68"	8 mm	11 9	2.32   24.92 2.26   24.32
ssic	SUPER NATURAL	1288 x 195 mm   50.71" x 7.68"	8 mm	9	2.26   24.32
Classic Laminate Flooring	CASTELLO	1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89

Weight/Pa [kg   lbs	
16   36	45 = 106   1144
16   35 17   38 19   41 23   51	60 = 98   1250 52 = 97   1040 48 = 95   1024 45 = 112   1210
16   35 16   35	32 = 79   849 52 = 127   1362
20   44	40 = 109   1177
17   38 17   36	32 = 74   797 52 = 118   1265
13   29	52 = 118   1265
6   13	96 = 84   902
20   44	36 = 71   760
15   34	52 = 78   843
15   33	52 = 91   984
15   34 15   34	32 = 74   797 52 = 118   1265
15   34	52 = 118   1265
15   34	52 = 115   1242

















\* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur





www.krono-original.com www.facebook.com/KronoOriginal



www.kronospan.com info@krono-original.com